

Standard 21/5 W 12 V BAY15d



Product family benefits

- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

Product family features

- Broad product range
- Good quality thanks to German technology
- Lamps for exterior applications are ECE certified
- Normed light output
- Basis for good light distribution

Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



N380



N380-02B

Product information

Application (Category and Product specific)	Auxiliary lamp
---	----------------

Electrical data

Power input	25 W
Test voltage	13.5 V
Power input tolerance	±6 %
Nominal wattage	21/5 W
Nominal voltage	12.0 V

Photometrical data

Luminous flux	440/35 lm
Luminous flux tolerance	±15 %

Dimensions & weight

Diameter	27.0 mm
Product weight	10.50 g
Length	52.5 mm

Lifespan

Lifespan Tc	160 h
Lifespan B3	60 h

Additional product data

Base (standard designation)	BAY15d
-----------------------------	--------

Certificates & standards


ECE category	P21/5W
British standard	380

Logistical data

Order reference	N380
-----------------	------

Packaging Information

Packaging description	EAN	Packaging type	Amount of article
N380	4008321770448	Folding box	10
N380-02B	4008321799555	Blister	2

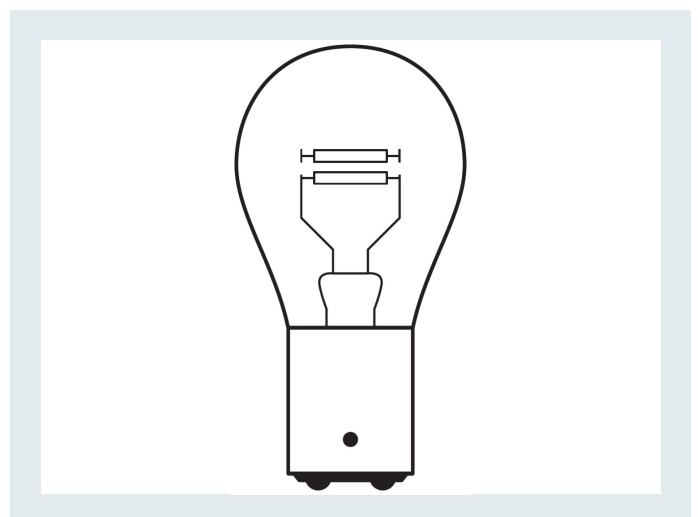

Product datasheet

NEOLUX[®]
GERMAN TECHNOLOGY

NEOLUX Automotive Lighting
OSRAM GmbH

Marcel-Breuer-Str 6
80807 Munich, Germany

Phone +49 89 6213-0
Fax +49 89 6213-2020

www.neolux-lighting.com