

## Standard 21 W 12 V BA15s



### Product family benefits


- Suitable for the most common signal and interior applications
- Affordable
- Reliable manufacturer
- For good visibility
- Reliable products

### Product family features

- Broad product range
- Good quality thanks to German technology
- Lamps for exterior applications are ECE certified
- Normed light output
- Basis for good light distribution

### Areas of application

- Position and parking light
- Indicator, brake, fog and reversing lights
- Number plate and side position lights
- Interior lighting and reading lights
- Instrument and switch lighting



N382



N382-02B

**Electrical data**

Power input	25 W
Test voltage	13.5 V
Power input tolerance	±6 %
Nominal wattage	21.00 W
Nominal voltage	12.0 V

**Photometrical data**

Luminous flux	460 lm
Luminous flux tolerance	±15 %

**Dimensions & weight**

Diameter	27.0 mm
Product weight	7.20 g
Length	52.5 mm

**Lifespan**

Lifespan Tc	320 h
Lifespan B3	120 h

**Additional product data**

Base (standard designation)	BA15s
-----------------------------	-------

**Certificates & standards**


ECE category	P21W
British standard	382

**Logistical data**

Order reference	N382
-----------------	------

**Packaging Information**

Packaging description	EAN	Packaging type	Amount of article
N382	4008321770479	Folding box	10
N382-02B	4008321781154	Blister	2

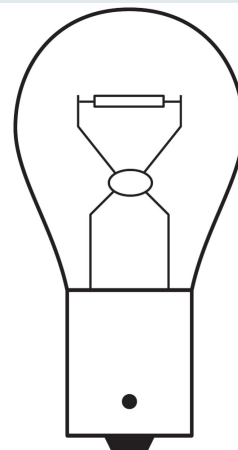

## Product datasheet

[www.neolux-lighting.com](http://www.neolux-lighting.com)